


chandler®



INDUSTRIAL & HOUSEHOLD

SEWING CUTTING & PRESSING EQUIPMENT

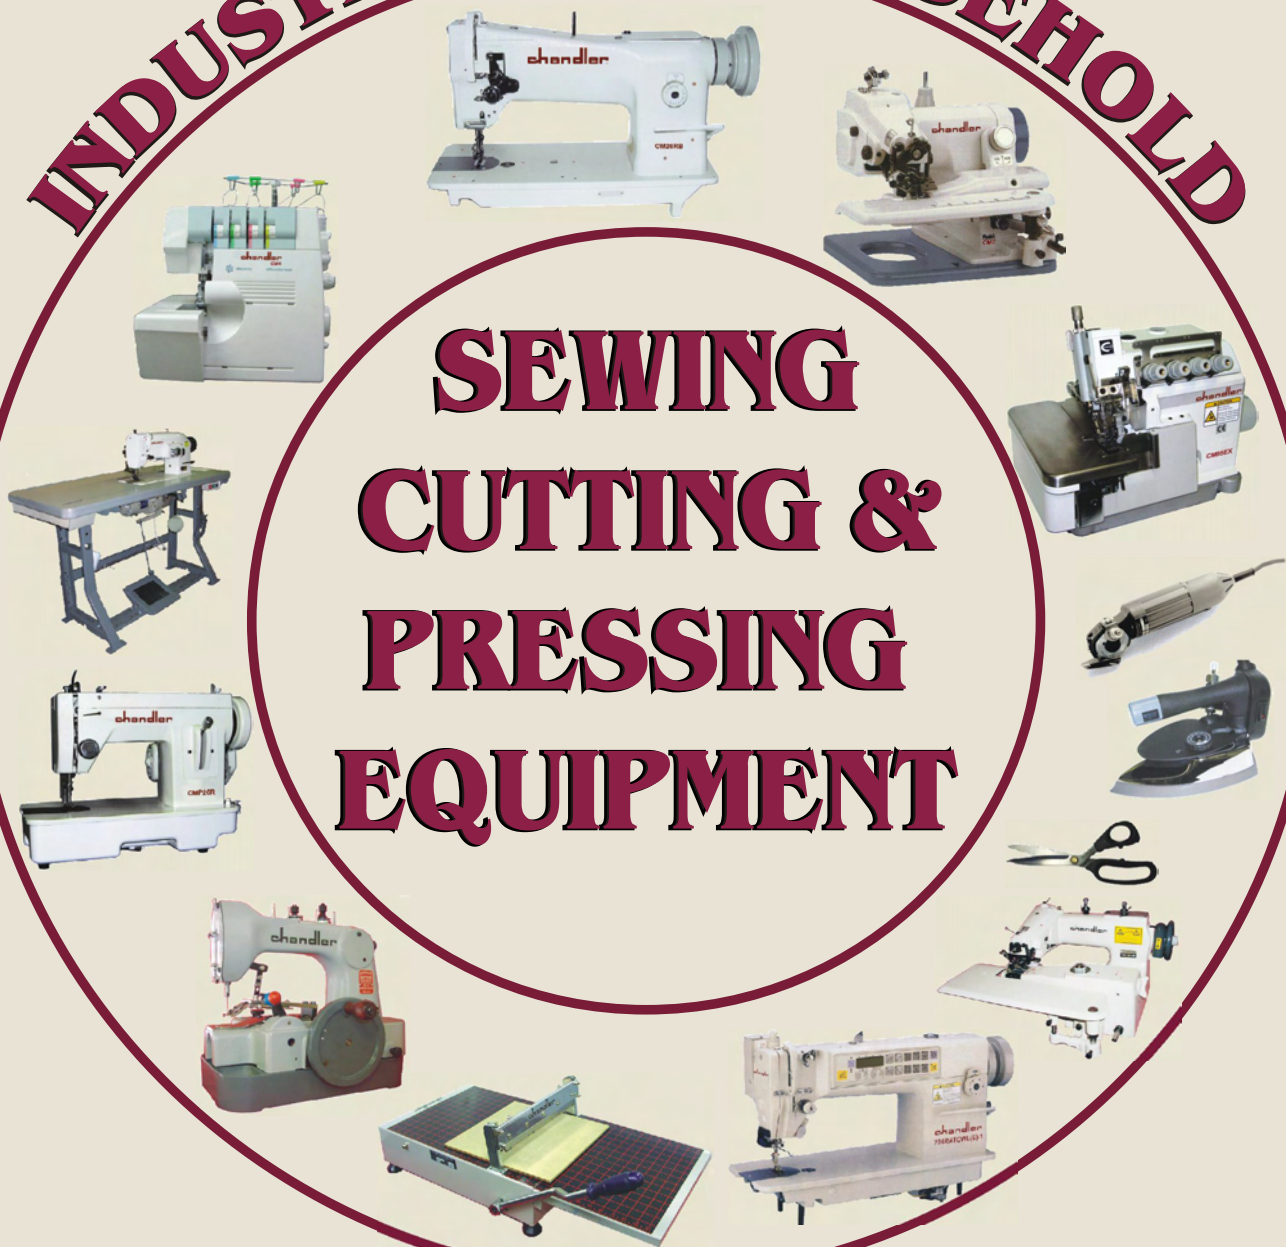

PORTABLE BUTTON SEWER

Model CM491

PORTABLE, HAND-OPERATED BUTTON SEWING MACHINE

- No electricity needed
- No experienced operator necessary.
- Instant change for sewing both 2 and 4 hole buttons.
- Six to ten seconds to sew on a button.
- Automatic stop
- Automatic thread-break.
- Takes full range of button sizes.
- Sewes all types of flat buttons,
- Twelve firm stitches in every button, with last two stitches double-locking button to material.
- Exceptionally durable, high quality construction.
- Net Weight (head only)- 37 lbs.
- The finest, easiest to own and most practical machine for shirts, pajamas, uniforms, underwear and work clothes.



Chandler Model CM491 CLASSIC HAND OPERATED BUTTON SEWER

- completely portable and automatic
- no electric plug or connections necessary
- no motor to worry about
- no belts to break



Chandler Sews Them All



Heavy
Steel
Stand
also
available
for
CM491

*Anyone can learn to
operate it in minutes!*

AMAZINGLY FAST!

Speedy, sure button replacement eliminates labor and reduces customer complaints. This machine will meet all your tailor and cleaners service requirements! It's even easy enough and fast enough to be on a clothing production line.



End View of CM491

BUTTON SEWER / TACKING MACHINE


MODEL CM24K

Single Needle, Single Thread
Chainstitch, Cylinder Bed
Button Sewing And Tacking Machines
With
Vibrating Clamp, Single Pedal Operation
8-16-32 Parallel Stitches
Two Or Four Hole Button Sewing Operation
Thread cut by scissor action

Speed, Max. (S.P.M.) *	1500
Needle Bar Stroke	1-59/64" (48 mm)
Number of Stitches	8-16-32 parallel stitches
Needle	175 x 7
Looper	5123
Stitch Type	101



CM24K
on
optional
stand

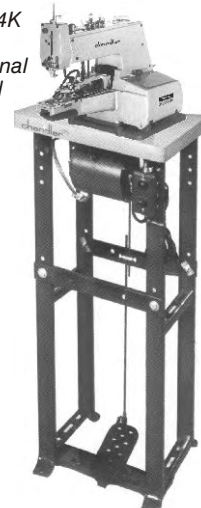

* Speed depends on materials, thread and operation
Specifications subject to change without notice.

SINGLE NEEDLE LOCKSTITCH

CM736R series *Featuring Quality JAPANESE COMPONENTS*

ULTRA HIGH SPEED, SINGLE NEEDLE, DROP FEED, LOCKSTITCH MACHINE

Fully automatic lubrication with recirculation pump

Reverse Feed

"Feather-touch" pressure foot lifter

Noise and vibration absorbing table mounting

SPECIFICATIONS FOR CM736R

Speed @ Max (S.P.I.)*	5500*
Clearance Under Foot	1/4" (6 mm)
Needle Bar Stroke	1 1/4" (31.8 mm)
Stitch Length, Max.	5 SPI (5 mm)
Needle	16 x 257
Bobbin - Metal	419 - 2110114 - 321
Bobbin - Pre Wound	L
Hook	417A - 2111004 - 310A
Bed Size	7" x 18 1/8" (177 x 477 mm)
Work Space	10" (258 mm)
Stitch Type	301

Complete K.D. or assembled stands available!



For sewing light to heavy-weight materials including cottons, knits, polyester, nylon, sheer fabrics and denim

Suitable for stitching such products as blouses, shirts, men's, ladies and children's apparel, uniforms, overalls, lingerie, etc.

Heavyweight fabrics such as jeans can be sewn by changing the needle plate, feed dog, foot, stitch regulator, hook and needle bar

Also available:
 CM736RB - Large Bobbin
 CM736RH - Heavy Duty
 CM736RH-R - Heavy Duty with Roller Foot

CM736RATCWL(E)-1

FULL AUTO FUNCTION

High Speed, Single Needle, Drop Feed, Lockstitch Machine *with* Auto Reverse, Under Bed Thread Trimmer, Thread Wiper, Electric Foot Lift, Stitch Counter, Ho Hsing Servo Motor. *Featuring Quality Japanese Components*



Also available:
 CM736RBATCWL(E)-1 - LARGE BOBBIN
 CM736RHATCWL(E)-1 - HEAVY DUTY

SPECIFICATIONS	
Speed @ Max (S.P.I.)*	5,000 rpm*
Clearance Under Foot	1/4" (6mm)
Needle Bar Stroke	31.8mm
Stitch Length, Max.	4mm
Needle	16x257
Hook	Auto-Lubricating

Ho Hsing Servo Motor



MODEL CM2053R-1

SINGLE NEEDLE, DROP FEED, ZIG-ZAG, LOCKSTITCH MACHINE

Horizontal Axis Transverse Rotary Hook Reverse Feed

Combination Zig-Zag And Straight Stitcher

Built-In Bobbin Winder, Needle Position Adjustment

Metal Gears (Hardened Steel)

Adjustable Reverse Stitch Length



Don't forget to order your stand, complete with motor. Comes assembled or knock-down kit.

Speed, Max. (S.P.M.) *	2500
Clearance Under Foot	1/4" (6mm)
Needle Bar Stroke	1 1/4" (31.5 mm)
Stitch Length, Max.	5 s.p.i. (5 mm)
Needle	135 x 5
Stitch Width Max.	3/8" (9 mm)
Stitch Type	304

* Speed depends on materials, thread and operation
 Specifications subject to change without notice.

OVERLOCK, COVERSTITCH PORTABLE

CM 4 (DIFFERENTIAL FEED)

PORTABLE, OVERLOCK STITCH MACHINE – 4 THREAD, 2 NEEDLE

Perfect for sample rooms, alteration rooms, tailor's shops, drapery shops, dry cleaners, department stores, dress makers and the home


COLOR CODED THREADING

FLIP-UP CARRYING HANDLE
FLAT BED OR CYLINDER BED
LOCKING STITCH LENGTH
REGULATOR



BUILT-IN SEW LIGHT
ELECTRONIC FOOT OPERATED
SPEED CONTROL

110 VAC, 1-PHASE, 60 Hz.

{220 VAC, 1-PHASE AVAILABLE}

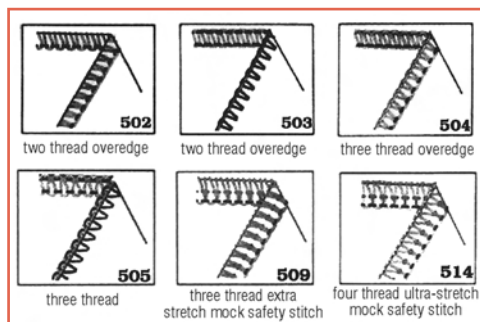

Speed, Max. (S.P.M.)*	1300
Clearance Under Foot	15/64" (Up to 6 mm)
Stitch Length, Max.	24 s.p.i. (1mm - 4mm)
Needle	#2054, 10#-16#
Overedging Stitch Width	(3 - 6.7 mm)
Max. Stitch length	(1~4mm)
Max. presser foot lift	(4.5mm)

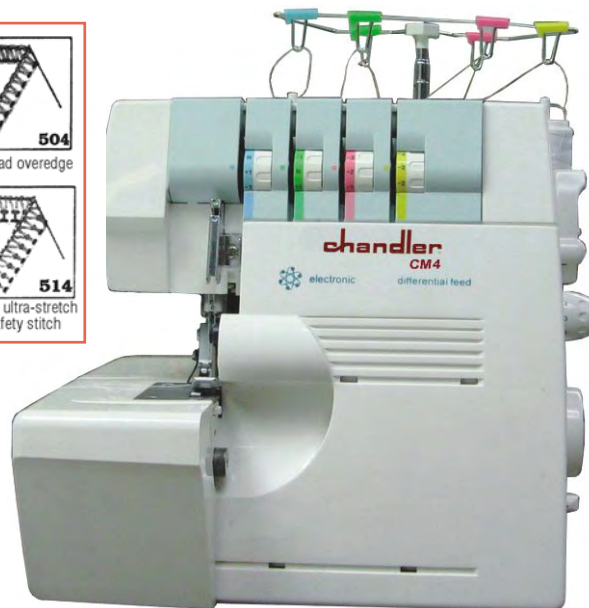

CM 5

PORTABLE "Coverlock"

NOW WITH INSTRUCTIONAL VIDEO ON CD DISK!


5-thread, 4-thread, 3-thread, 2-thread Configuration

- COVERSTITCH - SAFETY STITCH -
- OVERLOCK - PEARL STITCH -


- 5-4-3-2 Thread Configuration
- Differential Feed
- Adjustable Cutting Width
- Color-Coded Lay-In Tension
- Auto Tension Release
- Cover Hem and Lower Looper Auto Threaders
- Attachable Clean Pocket
- 10-Piece Accessory Kit
- Maximum speed of 1,300 stitches per minute
- Electronic speed control
- Adjustable stitch length (2 mm to 4 mm)
- Extra presser foot lift
- Built-in light, ruler, handle and seam guide
- Soft dust cover



FLAT BED OR CYLINDER BED

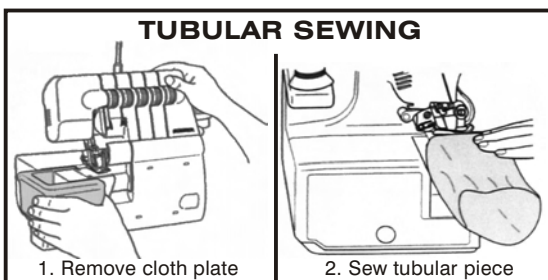

Speed, Max. (S.P.M.) *	1300 *
Clearance Under Foot	4.5 mm
Stitch Length, Max.	4 mm
Overedging Width	3 - 7.7 mm
Coverstitch Width	4 mm
Stitch Type	(see chart at left)
Shipping Weight	21 lbs.

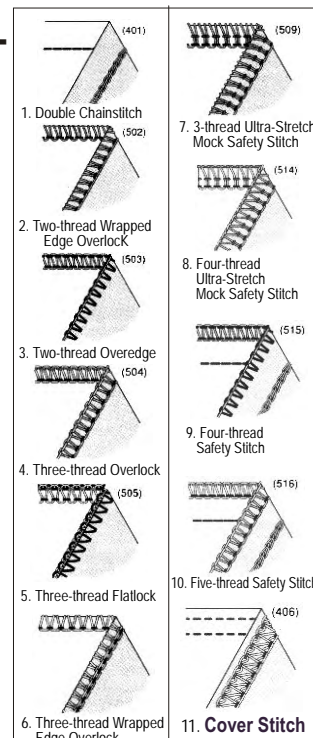

OVERLOCK MACHINES INDUSTRIAL


EX Series High-Speed Overlock Machines

With Fully Automatic Lubrication • Differential Feed with Micrometric Adjustment • Push Button Stitch Regulator

- Speed, Max. up to 8500 s.p.m. (depending on materials, thread & operation)
 - Fully automated lubrication with visual flow controls
 - Lubricating oil continuously filtered by replaceable filter.
 - External cooling of oil supply • Push-button stitch regulator
 - Differential feed with micrometric adjustment for shirring and stretching. Ratio up to 4 to 1
 - Intermitent action possible • Standard type B-29 needles
- * Needle Gauge Note: Comes with standard gauge but more gauges are available.

CM93EX

For overlock sewing of light to heavyweight materials

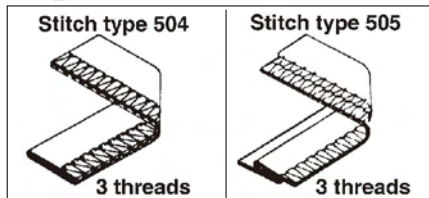

SPECIFICATIONS CM93EX

Max. Sewing Speed:	8,500 S.P.M.	Overedging Width:	3, 4, 5 mm
Presser Foot Lift:	5.0 mm	Stitch Length, Max:	3.8 mm
Differential Ratio:	1 : 0.7 ~ 1 : 2	Number of Threads:	2 / 3
Needles:	1		


CM95EX

For overlock sewing of medium to heavyweight materials

True Safety Stitch - suitable for sewing products such as men's, ladies' and children's wear, especially coats for children and women.



Note: CM95EX has a 5th thread tensioner on the side

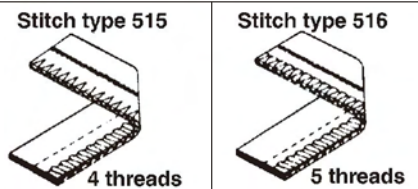


SPECIFICATIONS CM95EX

Max. Sewing Speed:	7,500 S.P.M.
Presser Foot Lift:	5.0 mm
Differential Ratio:	1 : 0.7 ~ 1 : 2
Needle Gauge (2) *:	5 mm standard
Overedging Width:	5, 6 mm
Stitch Length, Max:	3.8 mm
Number of Threads:	4 / 5

CM94EX

For overlock sewing of medium to heavyweight materials

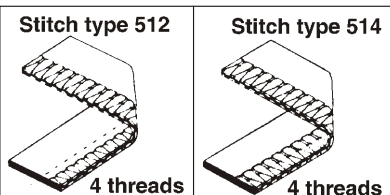

Mock Safety Stitch - Great for narrow overedging widths. Suitable for seaming sides and joining

SPECIFICATIONS CM94EX


Max. Sewing Speed:	7,500 S.P.M.	Overedging Width:	3, 4, 5 mm
Presser Foot Lift:	5.5 mm	Stitch Length, Max:	3.8 mm
Differential Ratio:	1 : 0.7 ~ 1 : 2	Number of Threads:	4
Needle Gauge (2) *:	2 mm standard		

CM94EX mounted in complete stand



Chandler stocks all types of stands, motors, pedals, lamps, needles, thread stands, and accessories. Call us for all your sewing needs.

** Call for information on other stitch patterns:



* Speed depends on materials, thread and operation
Specifications subject to change without notice.

BLINDSTITCH MACHINES

CM61 Mini Skipper

Ideal for alteration rooms, tailors, clothing rentals, dry cleaners, department stores, dressmakers and home use

ALL-PURPOSE • PORTABLE • SINGLE THREAD CHAINSTITCH, BLINDSTITCH MACHINE

SWING-DOWN CYLINDER ARM, METAL SWING PLATE
ADJUSTABLE THREAD TENSION

1 to 1 NON-SKIP STITCH AND 2 to 1 SKIP STITCH

Plus... Stitch penetration and stitch length adjustment dials give you big-machine features in a light-weight, compact and fully portable unit


Perfect for sewing all weights of materials including synthetics, woolsens, cottons, fabrics and knits

1 to 1 non-skip stitches, typical operations include felling edge tapes, bottoms of trousers, cuffs, wiggling in sleeves, facings to canvas and knit goods, turned-up bottoms of fully lined coats, padding collars and lapels, and reinforcing trouser seats

2 to 1 skip stitch for hemming dresses, skirts, slacks, trousers, sportswear, ladies coats, draperies, blouses and other articles

Suitable for felling operations requiring a skip stitch to simulate hand-stitching

2 to 1 skip stitch is recommended for synthetics and other lightweight materials and 1 to 1 for heavier cotton, woolen and linen goods



Featuring
SWING-DOWN
CYLINDER ARM
with
METAL SWING PLATE



Speed, Max. (S.P.M.)	1000 *
Stitch Length, Max.	3 1/2 s.p.i. (7mm)
Needle Style	LWX 6T
Cylinder Diameter	1 5/8" (40 mm)
Work Space (Needle to Arm)	4" (100 mm)
Stitch Type	103

CM101

**SINGLE THREAD, CHAINSTITCH
BLINDSTITCH MACHINE**

With Skip And Non-Skip Stitch Lever,
Swing-Down, Narrow Cylinder Arm,
Adjustable Thread Tension
1 To 1 Non-Skip Stitch
and 2 To 1 Skip Stitch



Don't forget to order
your stand, complete
with motor. Comes
assembled or
knock-down kit.




**"INVISIBLE"
SINGLE THREAD
CHAINSTITCH**

**Does in 5 minutes
what would take
an hour by hand**

Speed, Max. (S.P.M.)	2500 *
Stitch Length, Max.	1/4" - 3/8" (3 - 8 mm)
Cylinder Diameter	2-1/4" (57 mm)
Work Space (Needle to Arm)	7" (180 mm)

SKIP
STITCH

NON-SKIP
STITCH



Has no equal.... Saves time, labor & nerves.
Sews ALL materials with a beautiful,
positive Blind Stitch.

PORTABLE HOME MACHINE


CM96

**PORTABLE,
LIGHT-WEIGHT
FREE ARM
SEWING MACHINE**

- Built-in 110 vac motor
- Built-in Light
- Oscillating hook
- Automatic clutch for bobbin winding
- Built-in tension with accurate setting
- Easy slide reverse lever
- Easy view pattern selector window
- Carrying handle
- Free arm
- Strong torque for heavy fabric
- Durable construction
- Auto threader



STITCH
SELECTION

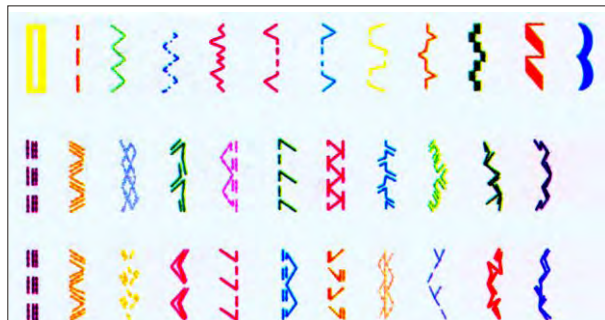

UPHOLSTERY & LEATHER MACHINES

CM25RB Horizontal Hook


Specifications:
Max stitch: 8 mm
Max speed: 2000 S.P.M
Presser Foot Lift:
(by Hand) 1/4" (6.5 mm)
(by Foot) 5/8" (16 mm)
Needle: 135 x 17,
DP x 17
Stitch Type: 301

LARGE
BOBBIN



Single needle, drop feed, alternating presser foot, lockstitch machine. Large horizontal axis rotary hook and bobbin, reverse feed, semi-automatic lubrication.

Uses: For medium to medium-heavy weight materials such as cloth, synthetics, vinyl, canvas, leather and laminated materials



CM406RB-1 DROP FEED, NEEDLE FEED Horizontal Hook

Specifications:
Max stitch:
2 1/2 s.p.i (10mm)
Max speed: 3300 S.P.M.
Clearance Under Foot:
9/16" (14mm)
Needle Bar Stroke:
1-5/16" (33 mm)
Needle: 135x17,
DPx17
Stitch Type: 301



LARGE
BOBBIN

Extra Long Stitch. High speed, heavy duty, single needle, drop feed, needle feed, alternating presser foot, lockstitch machine. Large horizontal axis rotary hook and bobbin, lubrication system, reverse feed, safety clutch.

Uses: For medium to heavy-weight materials such as leather, vinyl, upholstery, synthetics, canvas and various coated and laminated products. For auto, boat and furniture upholstery, tarpaulins, covers, sails, tents, luggage, handbags, camping equipment, orthopedic appliances.

Also available: **CM406RBL-18** - 18" long arm & **CM406RBL-25** - 25" long arm

PORTABLE UPHOLSTERY & LEATHER MACHINE

CMP26R

Single Needle
Drop Feed, Walking Foot,
Lockstitch Machine with
Built-in 110 vac Motor,
Horizontal Oscillating
Hook and Reverse.



SPECIFICATIONS

Speed, Max. spm: 800*
Stitch Length, Max: 6 mm
Needle Bar Stroke: 30 mm
Needle: DP x 17 18-23
Motor: 1/10th HP, 110 vac
Bed Size: 14-1/2" x 7"
Underarm Space: 7" x 4-1/2"
Net Weight: 18.6 kg (41 lbs)



Comes With Deluxe Foot Control

* Optional carrying case available.

For medium to heavy canvas, vinyl, leather etc.

MOTORS

Premier CSM550 550 Watts Premier CSM400 400 Watts

3/4 Horsepower
1/2 Horsepower

ELECTRONIC SERVO MOTORS



FEATURES

- Uses the same mounting holes as a clutch motor
- High Torque
- Switch, Cord and Plug & Hardware included
- Adjust speed, 0-3450 r.p.m., easily with Control Knob
- Reversible with Switch
- Quiet operation, silent when in stopped position
- No clutch disc required
- Energy efficient circuitry
- Amco 3/4" shaft standard
- Lightweight: 30 lbs.
- Belt guard included
- Built-in 6V light socket
- Vibration absorbing rubber motor mounts
- 110V, also available in 220V

Clutch Motors

1/2 / 3/4 / 1 Horsepower



- Dual voltage (110/220), single phase
- Energy Efficient Circuitry
- Prelubricated Sealed Ball Bearings
- Built-in Light Receptacle
- Reversing Plug (single phase only)

STANDS LEGS TABLES

- Lights, Thread Stands, Ruler Tape and all accessories available.
- Table tops cut to fit your machine.
- Knock-Down and Assembled Stands in most styles



CUTTING MACHINES & SCISSORS

CM-C1 "THE BIRDIE"

PORTABLE ELECTRIC ROTARY SHEAR

Lightweight, powerful rotary shear (scissor action) that lets you cut fabric with incredible ease and accuracy.

MAINTENANCE FREE! Comes with built-in sharpener and safety features.

The Birdie is excellent for narrow curves and sharp corners. For cutting single and low lays of material including cloth, knitted fabrics, plastics, synthetics, leather, lace, fiberglass, vinyls, etc. Used for slitting and trimming knitted fabrics when base plate is removed.



Machine Specifications:

Weight - 21 ounces
Blade Size - 1-7/8"
Cutting Depth - 7/16" (Max.)
Electrical - 115 V.
(220V on Special order basis)

- Grip-style Switch Bar - automatically stops when NOT pressed.
- Fast, accurate Scissor Action Cuts - ensured by carbide blade.
- No fusing or "Pull In" of materials.
- 7-Sided High-Speed Steel Blade - easy to change and longer lasting.

CM-C5 "TUFFY"

Lightweight, Portable Rotary Shear

Machine Type HEXAGONAL KNIFE
Blade Size 2" (50mm)
Cut Dpth, Max. 9/32" (7.2mm)
Weight 19 ounces (540 gr)
50 Watt Motor AC/DC 115 volts
(220 volts available)

This machine comes equipped with knife guard, sharpener, hangar hook and a 6-1/2-foot line cord with standard plug. Additionally, it features a worm gear drive for efficient, effortless operation.



CM515


Highspeed Stand-Up Type Round Knife Machine

Blade Size 3-1/2" (90mm)
Cutting Depth, Max. 11/16" (18mm)
Weight 4 lbs. 10 oz. (2 kg.)
Power 1/10 HP Universal type series motor
AC/DC 115 volts (220 volts available)



My-T-Fine Cutter

- Cordless 3.6v.
- Rechargeable (up to 75 min./charge)
- Ergonomic design
- Slip resistand handle
- Easy, 1 finger control
- 8 oz. / 9" long
- Convenient charging base
- AC Charger

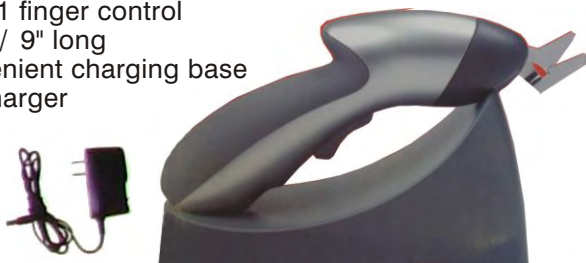

501P Heavy Duty Cordless Electric Shear

With heavy duty NiCad Battery Pack & temperature controlled Quick Charge Charger

115 v ac
Battery
Charger



Removable
NiCad Battery Pack

- Cuts material of up to 1/2" (12 mm) in thickness, including knitted fabrics, leather, carpet, fiberglass, etc.
- A 2-15/16" (60 mm) 10-sided round knife and carbide tipped stationary counter knife, - self sharpening.
- With battery attached only weighs 2.5 lbs / 11-1/2" long.

SMOOTH-CUT® SCISSORS

SMOOTH-CUT®

©2009 Consew 309- USA

CSC-1000 - 10" Dressmaking Shears



SOLID CORE
THUMB
HANDLE

ERGONOMIC,
FLEXIBLE
BOTTOM HANDLE

Smooth-Cut's ergonomic design works well with the right hand and also the left hand.

- CSC-1200 (12")
- CSC-1000 (10")
- CSC-9001 (10")
- CSC-8001 (9")
- CSC-8000 (8")

CSC-8000



Note the flat line of blade to handle of the CSC-9001

CSC-TC0124P Stainless Steel Nipper



CSC-TC0122CB Stainless Steel Nipper / Curved Blades




CSC-TC0122CB
side view

SWATCH CUTTERS

Portable!
Fits Easily on a Desk Top.
Easy to Use
Perfect for Tailors



Custom fabric swatch books are easy with the CM12P

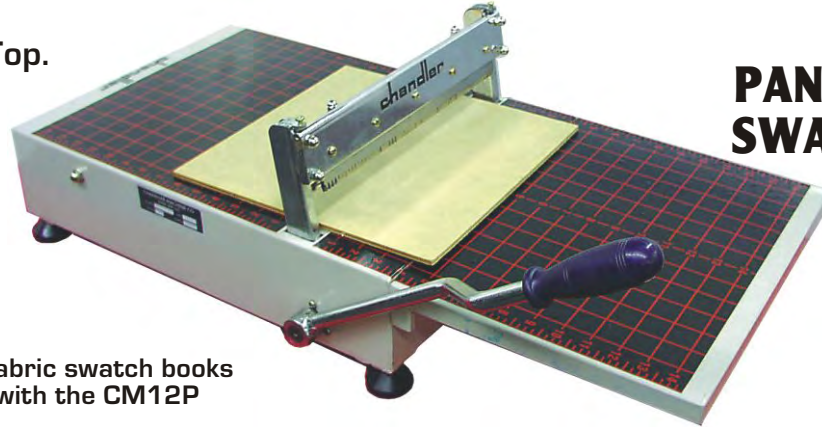

CM-12P-1 PANTS PINKER & SWATCH CUTTER

This Pants Pinker/ Swatch Cutter was developed to fill the need for a lightweight, easily portable machine that ANYONE can use. The knife lift is 1- 1/2 " so that many thicknesses of cloth, can be cut at one stroke. Cuts all kinds of materials. FAST and EASY to operate. You can produce thousands of accurately cut samples in a minimum amount of time.

An ideal machine for tailors, clothing manufacturers, fabric jobbers, and allied firms where floor space is at a premium. Sets up on any desk or table and requires no bolting or fastening of any kind.

Dimensions: 31" long x 13.5" wide x 20" high

Machine comes equipped with a #1 pink knife.


Extra Blades available separately:



Chandler USA is your source for...
Blade Sharpening and Fiber Cutting Boards for all sizes and makes of Swatch Cutters. We sell **NEW CUTTING BLADES** for ALL cutting machines! 12" to 32" in #1 & #7 Pinking blades and Straight blades.

This swatch cutter was developed to fill the need for a lightweight and easily portable machine that ANYONE can use. The knife lift is 1- 1/2 " so that many thicknesses of cloth, can be cut at one stroke. Cuts all kinds of materials, FAST and EASY to operate. You can produce thousands of accurately cut samples in a minimum amount of time.

An ideal machine for clothing manufacturers, fabric jobbers, and allied firms where floor space is at a premium. Great for pinking trouser bottoms. Sets up on any desk or table and requires no bolting or fastening of any kind. Body Dimensions: 31" long x 13.5" wide x 20" high

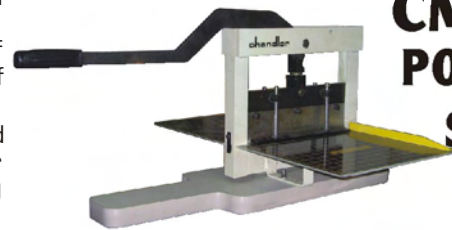

CM-12PH PORTABLE SWATCH CUTTER

Features:

- Easier, faster operation compared to manual Swatch Cutters
- Low current consumption
- Quiet operation
- 110 vac (220 vac available)
- Baked blue enamel paint
- Comes standard with pink blade (extra #1, #7 pink & straight blades optionally available)
- Capable of cutting paper, plastic materials, rubber, leather. If a scissor can cut it, you can cut a stack with the CM-5000 and CM-6000.
- Optional pressing adapter available to use die-cutting dies. (Custom forged steel diecutting dies can be special ordered)

Safety feature:

- Two Handed Switch operation keeps fingers safe.



CM-5000 19 1/2 Inch (50 cm) Blade width CM-6000 23 1/2 Inch (60 cm) Blade width SWATCH CUTTERS

Specifications:

Model:	CM-5000	CM-6000
Knife:	19.68" (50 cm)	23.62" (60 cm)
Weight:	363 lb 165 kg	429 lbs 195 kg
Max. Cut Thickness:	1-3/8" (3 cm)	
Length:	45 1/4" (1150mm)	39 3/8" (1000mm)
Width:	33 1/2" (850mm)	29 1/2" (750mm)
Height:	44" (1115mm)	44" (1115mm)

BLADES

For Swatch Cutters and Pinkers!! We have all your supplies!!
Chandler #1 and #7 Pinking Blades and Straight Blades: 12" - 32"
Give your dull blades to the Chandler Sharpening Service and get them back sharp!

JIFFY STEAMER **Model J-4000**


This Jiffy Steamer Model J-4000 is used by the clothing industry worldwide. This unit is useful in a variety of settings and applications including:

- Removing wrinkles from most kinds of fabrics
- Reducing the need to iron
- More gentle for fabrics than ironing
- Can be used on most any material or fabric
- Great for tablecloths, bedspreads and delicate apparel

Features:

- Standard plastic head
- Solid cast aluminum outer housing for durability
- 1500 watt heating element
- Stainless steel boiler tank
- The J-4000 design utilizes no water lines that could become clogged with hard water deposits
- Sight gauge for quick view of water level
- Color-coded high temperature wiring
- Automatic shut-off
- Convenient PREHEAT setting
- Back-up fusible link for safety
- 360° swivel casters for mobility
- 120 Volt, UL, CSA and CE approved

Shipping Weight: 25 pounds, 3 ounces Made in USA

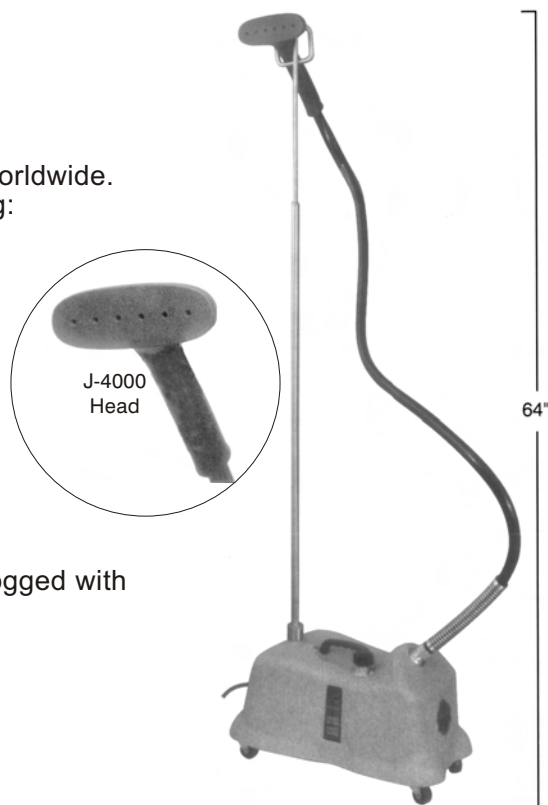

SILVER STAR STEAMER **Model SR-5000**

The 120V Silver Steamer SR-5000 works well under any kind of operating conditions. The preheater allows this steamer to emit steam promptly (in under a minute) and efficiently with little lag time between operations. Its excellent design permits 360° movability without leaking water from the water tank and ensures stability by using electrical parts approved by UL and CSA.

This steamer also features an automatic shut-off thermostat control and secondary fuse back-up system which ensures a fail-safe system to prevent burn-out of the heating element. Indicator lights show when unit is on or off.

Shipping weight 21 pounds. Made in Korea.





Teflon Shoe, Water Bottle with Filter, Hose & Stand

SILVER STAR
INDUSTRIAL STEAM IRON



chandler

chandler

GRAVITY FEED IRONS

CES-85AF




CES-85AF FEATURES

- U/L Approved Thermostat
- Thermostat Easily Replaceable
- Hard Anodized Aluminum Sole Plate
- Special Rubber Handle Keep Hands Super Cool
- Stainless Steel & Hard Anodized Aluminum Base For Superior Pressing Surface Durability


CES-85AF SPECIFICATIONS

Electricity	120 V / 220 V
Wattage	1000 W
Weight	5 lbs. (2.3 Kgs)
Base Size	8 1/16" x 4 15/16" (205mm x 124mm)

CES-85AF



CES-90A



CES-90A



CES-90A FEATURES

- U/L Approved Thermostat
- Hard Anodized Aluminum Sole Plate
- Specially Treated (TPR) Rubber Handle Keeps Hands Cool and Prevents Slipping.
- Stainless Steel & Hard Anodized Aluminum Base For Superior Pressing Surface Durability
- Impact-Resistant Heat Shield

CES-90A SPECIFICATIONS

Electricity	120 V / 220 V
Wattage	1000 W
Weight	4.6 lbs. (2.1 Kgs)
Base Size	7 7/8" x 4 7/16" (200mm x 112mm)

CES-300




CES-300 FEATURES

- Convenient Soft-Touch Button Switch & Rotary Heat Dial
- Heat Shield For Added Protection
- U/L Approved Thermostat
- High Quality Steam Distribution
- Hard Anodized Aluminum Sole Plate
- Comfortable Urethane Handle
- Modern Body Design - All Black


CES-300 SPECIFICATIONS

Electricity	120 V / 220 V
Wattage	1000 W
Weight	4.6 lbs. (2.1Kgs)
Base Size	8 1/4" x 4 3/4" (209mm x 120mm)



SILVERSTAR BOILER STEAM IRONS

BSP-300

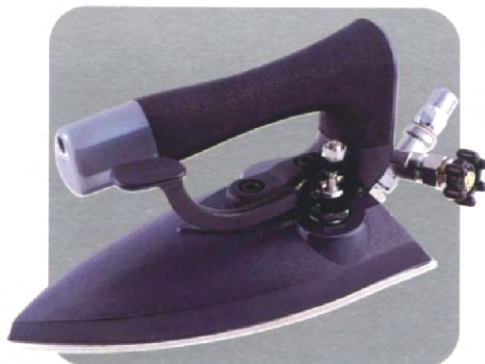

BSP-300 Specifications

Weight: 1.33kgs
Valve: Push Type
Base Size: 204x100 mm
Use: Under-Pressing and Finishing

BSP Series Steam Boiler Irons

- Long Lasting, Brass Steam Valve - Steam Volume Adjustment
- All Stainless Steel Base
- Plastic (P.E.T) Cover - Soft Handle
- Waste Water Valve - Steam Hose Cover
- Functional, Comfortable Design
- High Reliance Steam Valve Body
- Silicone Iron Rest

BSP-600



BSP-600
Specifications
Weight: 1.67Kgs
Valve: Push Type
Base Size: 205x147mm

BSP-200



BSP-200
Specifications
Weight: 1.05kgs
Valve: Push Type
Base Size: 190x60 mm
Use: Under Pressing

chandler®



Formerly Chandler Machine Company of Ayer, MA

www.chandlermachineco.com

1-800-225-5062

Main Office
400 Veterans Blvd.
Carlstadt, NJ 07072
Tel: 212-741-2474
Fax: 212-741-2481

Miami Branch Office
4077 N.W. 79th Avenue
Miami, FL 33166
Tel: 305-471-0200
Fax: 305-471-0243

West Coast Branch Office
2320 South Hill Street
Los Angeles, CA 90007
Tel: 213-745-8844
Fax: 213-745-8855



*Call us for all
your sewing needs.*

*Accessories, Parts, Supplies, Knives, Abrasives,
Belts, Gears, Nuts and Bolts, Connectors,
Lights, Pedals, Pins, Needles, Loopers, Feet,
Bobbins, Hooks, Attachments, Etc....*

CUTTING MACHINE FIBRE BOARDS & BLOCKS

FIBRE BOARDS

*{For any cutter that
uses a 3/16" (.187")
thick fibre board.}*



**Special order for the 1/8 or 1/4" board size*


Choose the size that fits your machine.

Length	Size	
	Width	Thickness
6.5"	x 6.5"	x .187"
8.5"	x 8.5"	x .187"
9.5"	x 9.5"	x .187"
10.5"	x 10.5"	x .187"
11.75"	x 11.75"	x .187"
12"	x 12"	x .187"
14"	x 14"	x .187"
20"	x 20"	x .187"
26"	x 26"	x .187"
30"	x 30"	x .187"
32"	x 32"	x .187"
42"	x 42"	x .187"
30.5"	x 50"	x 1/8" or 1/4"*

FIBRE BLOCKS

*{For any cutter
that uses a
1/2" or 3/4"
fibre block.}*


Length	Size	
	Height	Thickness
9.5"	x .5"	x .5"
11.5"	x .5"	x .5"
14.5"	x .5"	x .5"
16.5"	x .5"	x .5"
18.5"	x .75"	x .75"
22.75"	x .75"	x .75"
25 "	x .75"	x .75"
34.25"	x .75"	x .75"
34.5"	x .75"	x .75"
44.25"	x .75"	x .75"

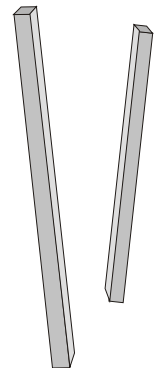

chandler keeps you sharp!

CUTTING BLADE SALES & SERVICE

- For Swatch Cutters and Pinkers!! We have all your supplies!!
- #1 and #7 Pinking Blades and Straight Blades: from 12" - 32"
- Give your dull blades to the Chandler Sharpening Service and get them back sharp!

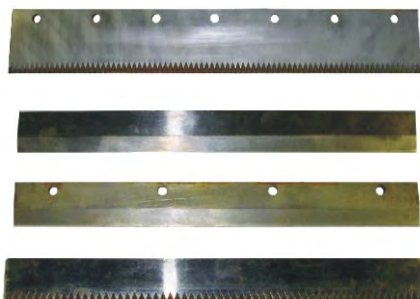

Pinking and Straight Knives

See our swatch cutters on page 8

#7 or #7A
Round
Pinking
Blade

